

## Joint Closure System for Pressurised Copper Telephone Networks

### TELECOM OUTSIDE PLANT

- High performance heat-shrinkable closure for pressurised applications
- Suitable for aerial, buried and ducted applications
- Composite material provides high mechanical strength
- Range of closures to suit all cable sizes
- Applicable for polyethylene and metal jacketed cables
- Pre-installed valve for pressure access and measuring
- Suitable for use with all standard connector systems
- Up to 4 cables out at each end
- Wraparound closure suitable for both maintenance and new construction
- Interchangeable air valve/connector
- Hot melt adhesive designed specifically for pressurised closure applications




XAGA 1000

# XAGA 1000

## Sizing/ordering information

(Dimensions in mm)



Description	Splice bundle dia. max.(A)	Single cable dia min.(B)	Sheath opening nom. (L)	Recommended sum of branch cable			Branch-off kit
				2 out max.	3 out max.	4 out max.	
XAGA-1000C-45/8-350	45	8	350	35	-	-	BOKT-1000-05
XAGA-1000C-62/15-250	62	15	250	52	40	-	BOKT-1000-6
XAGA-1000C-62/15-350	62	15	350	52	40	-	BOKT-1000-6
XAGA-1000C-62/15-500	62	15	500	52	40	-	BOKT-1000-6
XAGA-1000C-62/15-650	62	15	650	52	40	-	BOKT-1000-6
XAGA-1000C-92/30-300	92	30	300	82	70	58	BOKT-1000-6
XAGA-1000C-92/30-350	92	30	350	82	70	58	BOKT-1000-6
XAGA-1000C-92/30-500	92	30	500	82	70	58	BOKT-1000-6
XAGA-1000C-92/30-650	92	30	650	82	70	58	BOKT-1000-6
XAGA-1000-122/38-300	122	38	300	112	100	88	BOKT-1000-6
XAGA-1000-122/38-500	122	38	500	112	100	88	BOKT-1000-6
XAGA-1000-122/38-650	122	38	650	112	100	88	BOKT-1000-6
XAGA-1000-122/38-900	122	38	900	112	100	88	BOKT-1000-6
XAGA-1000-160/55-300	160	55	300	142	130	118	BOKT-1000-7
XAGA-1000-160/55-500	160	55	500	142	130	118	BOKT-1000-7
XAGA-1000-160/55-650	160	55	650	142	130	118	BOKT-1000-7
XAGA-1000-160/55-720	160	55	720	142	130	118	BOKT-1000-7
XAGA-1000-160/55-900	160	55	900	142	130	118	BOKT-1000-7
XAGA-1000-200/65-500	200	65	500	172	160	148	BOKT-1000-7
XAGA-1000-200/65-720	200	65	720	172	160	148	BOKT-1000-7
XAGA-1000-200/65-900	200	65	900	172	160	148	BOKT-1000-7


Branch-off clips BOKT-1000-05, BOKT-1000-6 and BOKT-1000-7 must be ordered as a separate item.

### XAGA 1000 kit content



- Heat-shrinkable sleeve
- Metal canister (2 half shells)
- Flexible stainless steel channels
- Underclips
- Aluminium closing strip
- Valve nut + 1 valve plug + 1 valve insert
- Shield continuity wire
- Cleaning tissue
- Aluminium tape
- Abrasive strip
- Installation instruction

### BOKT kit content

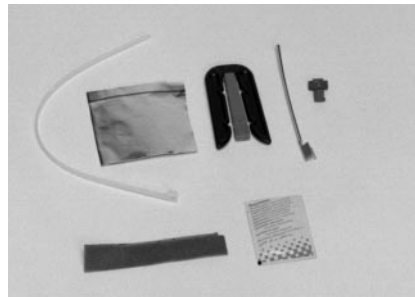

- Branch-off clip
- Cleaning tissue
- Abrasive strip
- Tie wrap
- Aluminium tape
- Shield continuity wire + connector

### Tyco Electronics Raychem NV Telecom Outside Plant

Diestsesteenweg 692  
3010 Kessel-Lo, Belgium  
Tel.: 32-16 351 011  
Fax: 32-16 351 697  
www.tycoelectronics.com

Tyco and XAGA are trademarks.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, Tyco Electronics makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. Tyco Electronics' obligations shall only be as set forth in Tyco Electronics' Standard Terms and Conditions of Sale for this product and in no case will Tyco Electronics be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of Tyco Electronics products should make their own evaluation to determine the suitability of each such product for the specific application.